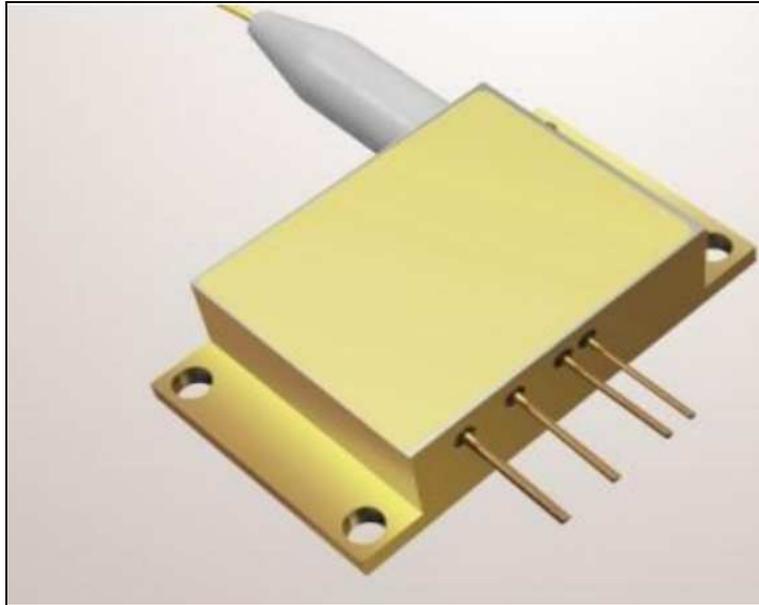


980nm 20W Fiber-coupled Diode Laser STK980FAHRN-20.00W

**Features:**

- 20W output power
- 980±10nm wavelength
- Fiber core diameter 50µm/0.22NA

Applications:

- Printing, ablation
- Science research

Our High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

To provide high quality products with reasonable price is our always goal.

Specifications (25°C)		Unit	STK980FAHRN-20.00W		
			Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW Output Power	W	20	-	-
	Center Wavelength ⁽²⁾	nm	980±10		
	Spectral Width(FWHM)	nm	-	6	-
Electrical Data	Electrical-to-Optical Efficiency	%	-	50	-
	Operating Current	A	-	9.5	11.0
	Threshold Current	A	-	0.5	-
	Operating Voltage	V	-	5.0	6.0
	Slope Efficiency	W/A	-	2.8	-
Feedback Isolation	Wavelength Range	nm	1020~1200		
	Isolation	dB	-	30	-
Fiber Data	Core Diameter	µm	-	50	-
	Numeric Aperture	-	-	0.22	-
	Fiber Length	m	-	1	-
	Fiber Loose Tubing Diameter	mm	-	0.9	-
	Minimum Bending Radius	mm	50	-	-
	Fiber Termination		-		
Others	Thermistor	(K Ω)/(25°C)	10±3%		
	ESD	V	-	-	500
	Storage Temperature ⁽³⁾	°C	-20	-	70
	Lead Soldering Temp	°C	-	-	260
	Lead Soldering Time	sec	-	-	10
	Operating Case Temperature ⁽³⁾	°C	20	25	30
	Relative Humidity	%	15	-	75

(1) Data measured under operation output at nominal power@25°C.


(2) A no-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case. Acceptable operating range is 20°C~30°C, but performance may vary.

OPERATING NOTES

- Avoid eye and skin exposure to direct radiation during operation.
- ESD precautions must be taken during storage, transportation and operation.
- Short-circuit is required between pins during storage and transportation.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- Use constant current power supply to avoid surge current during operation.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature ranges from 15°C to 35°C.
- Storage temperature ranges from -20°C to +70°C.

Package Dimensions (mm)

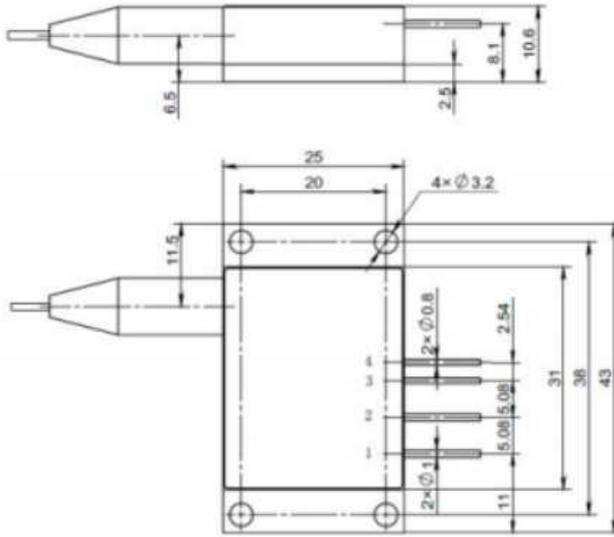

Pin	Function
1	LD (+)
2	LD (-)
3	Thermistor
4	Thermistor