

**Fiber-coupled Laser Diode Module  
STC-LDM-878.6-30**

## Typical Device Performance (25°C)


Optical	Unit	Typical Value
CW Output Power	W	30
Center Wavelength	nm	878.6±0.5
Spectral Width (90% of Power)	nm	<0.5
Wavelength Shift with Temperature	nm / °C	0.02
Wavelength Shift with Current	nm / A	0.05
Feedback Protection (1030-1100nm)	dB	>40
Electrical		
Threshold Current	A	1.0
Operating Current	A	9.5
Operating Voltage	V	9.0
Slope Efficiency	W / A	3.5
Power Conversion Efficiency	%	45
Fiber*		
Fiber Core Diameter	μm	400
Fiber Cladding Diameter	μm	440
Fiber Buffer Diameter	μm	700
Numerical Aperture	-	0.22
Fiber Length	m	1.0
Fiber optic connector	-	SMA905

\* Customized fiber and connector available.

## Absolute Ratings

	Unit	Min	Max
Operating Temperature	°C	10	40
Operating Relative Humidity	%	-	75
Storage Temperature	°C	-20	80
Storage Relative Humidity	%	-	90
Lead Soldering Temperature, 10 s max	°C	-	250

## Characteristics of 878.6nm-30W laser diode module (25°C)

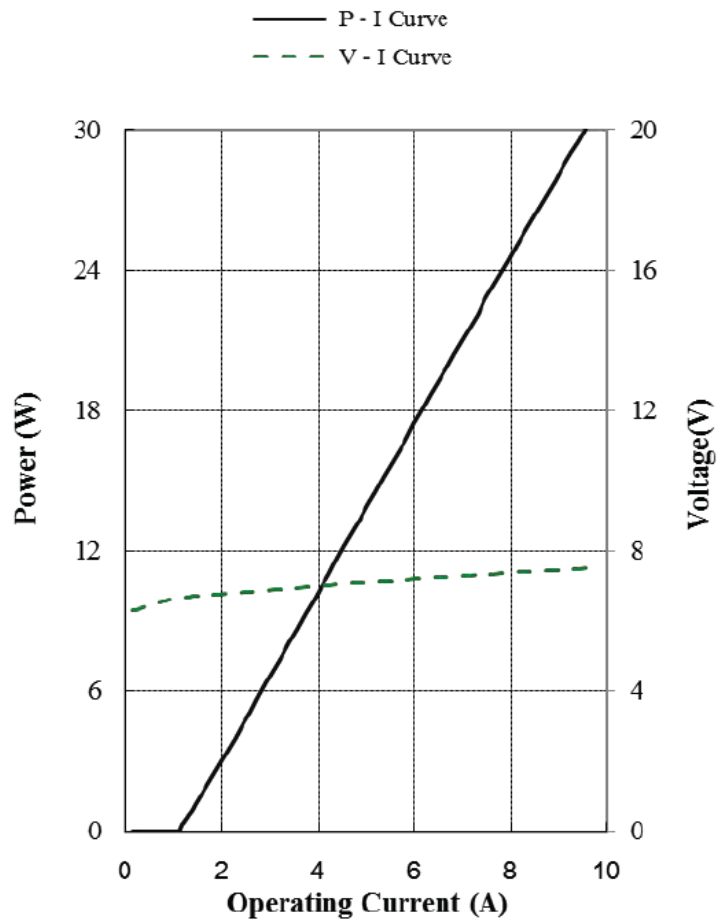

## Typical spectrum of 878.6nm-30W laser diode module (25°C)

